
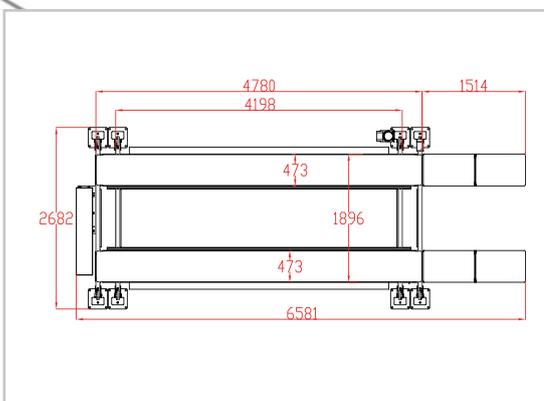
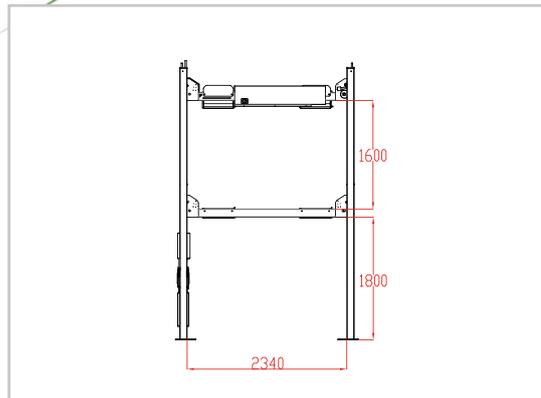


TRIPLE STACKER LIFT CE (PEP54/3500)

- Trilevel storage lift (ground +2 upper levels) to park 3 cars over each other.
- Unit is consisting of 2 integrated four post car parking lifts installed together.
- Hydraulic driven cylinders with steel ropes & sheaves system.
- Safety locks engage automatically inside ladders in all posts ,100 mm pitch.
- Additional safety locks will be activated in case of steel rope rupture.
- Electromagnetic lock release is activated when pushing Down button.
- Foldable ramps suitable for sport cars and occupy less space.
- Electric panel& hydraulic power unit of upper lift is placed inside a compartment fixed to the back side of its platform.
- Flexibility to install electric panel& HPU of lower lift inside a compartment fixed to the backside of platform or on the back of the front post.
- Individual operation boxes with Dead-man push button controls (UP, Down & Emergency) will be fixed on the front post.
- Runways are made from anti-slipping diamond plates with wheel stoppers .
- Steel parts are shot blasted then powder coated with desired color.

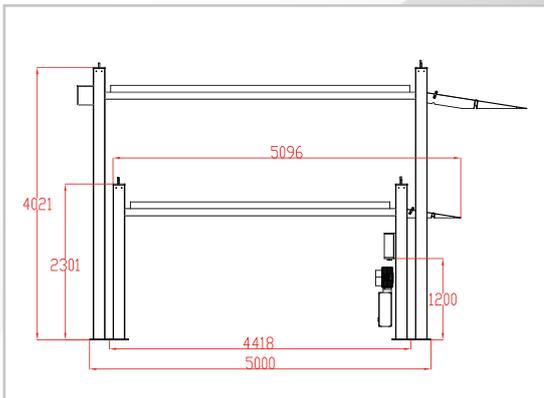

PARAMETERS

TRIPLE STACKER STORAGE LIFT

Model	PEP54 /3500	PEP54 /4000
Lifting Capacity	2700 kg / platform	
Net lifting Heights	1800 /1600 mm	1800 / 2100 mm
External dimensions	6581 x 2682 x 4021 mm	6669 x 2566 x 4588 mm
Platforms Dimensions	Lower: 4198 x 1896 mm / Upper: 4780 x 1896 mm	
Runway-Middle in Type	Diamond steel plates - Galvanized wave plates / Oil drip trays	
Type of ramp	Foldable diamond steel ramps (Optional checkered Aluminum)	
Voltage	380 V/50 Hz-60 Hz / 3Ph	
Operation System	Cylinders with Ropes. Back electric panels. Push-button controls	
Lock Release	Electromagnetic lock release	
HPU / Voltage	2.2 Kw / 220 V - 380 V / 50 Hz- 60 Hz / 1 Ph - 3 Ph	